


SHOWN = JACKLUBER 125CC MODEL

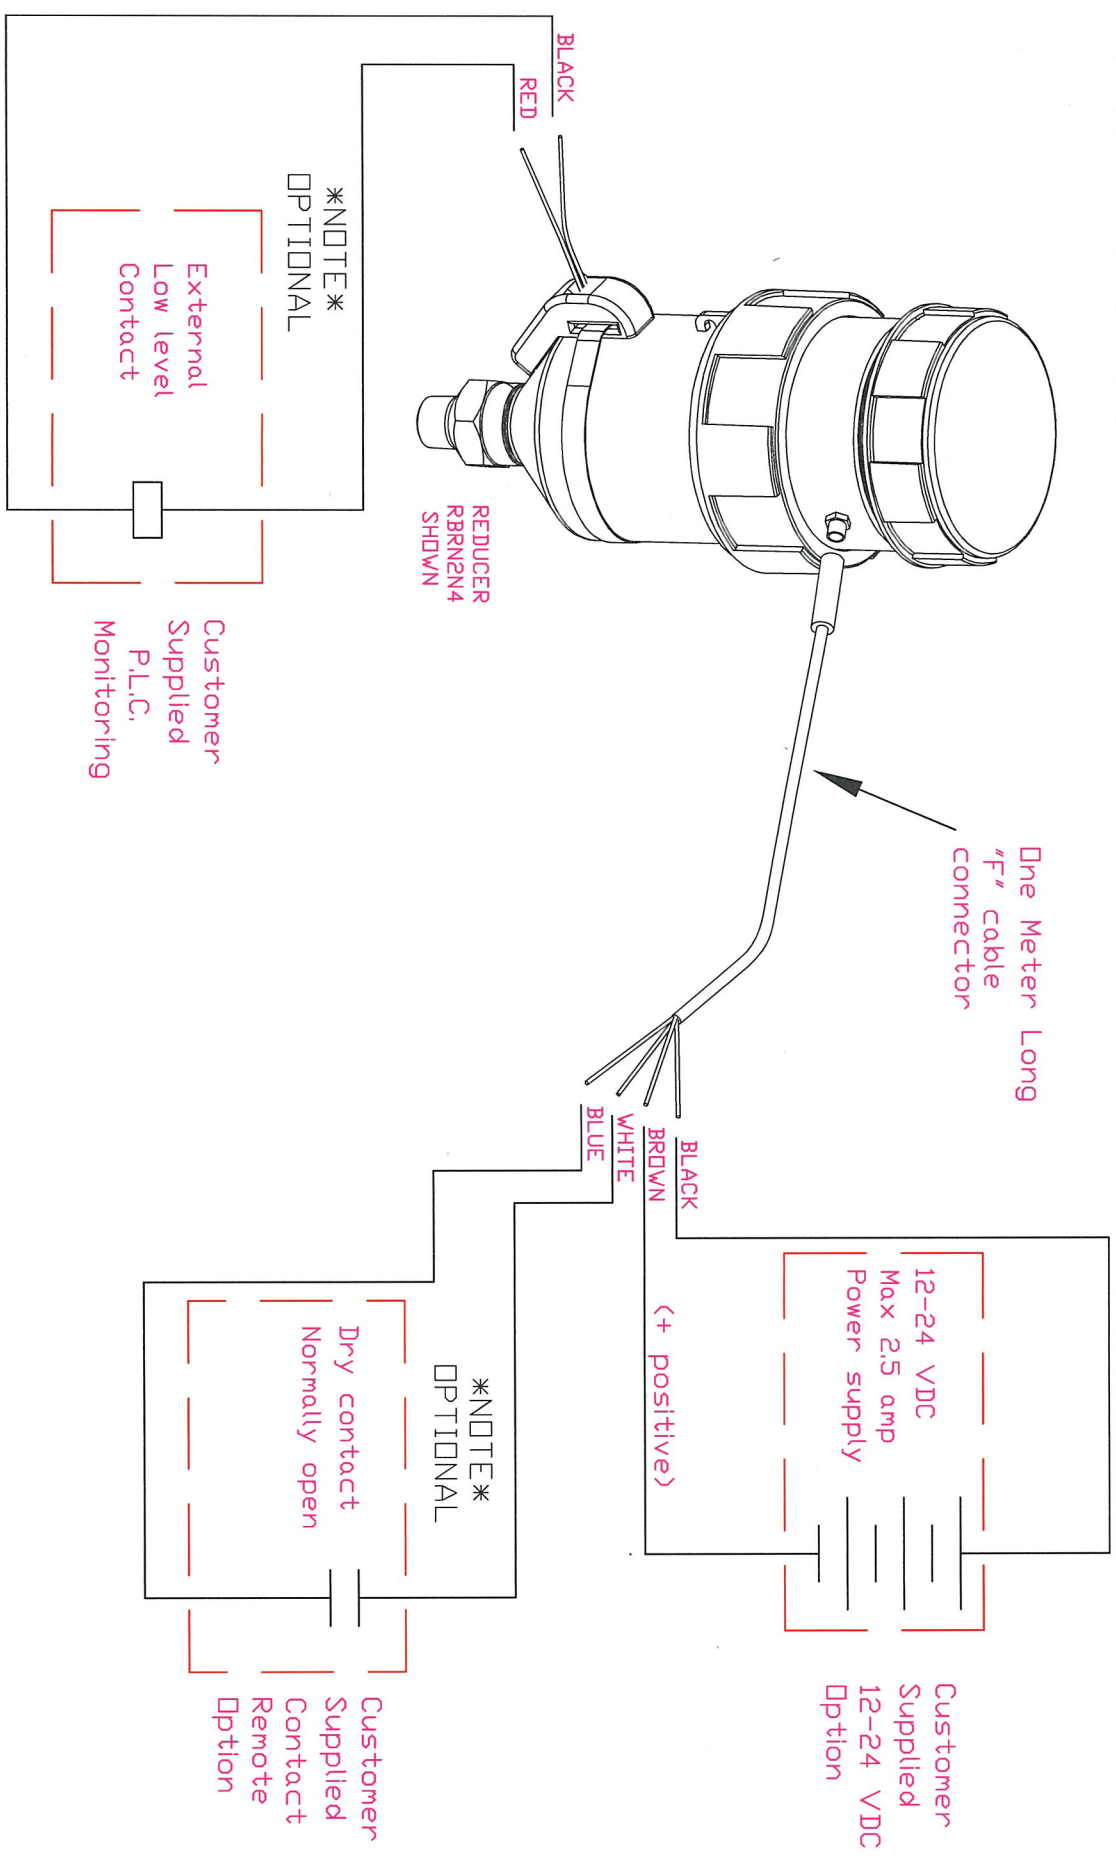

CUSTOMER NEEDS TO ORDER THE D.C. VOLTAGE REGULATOR OPTION WHEN ABOVE 12 VDC

NOT TO SCALE

NOTES:
 MOTOR RUNNING CURRENT DRAW : 0.15 milliamps
 MOTOR STARTUP CURRENT : 2.0 amps

NOTE REMOTE CONTROL REQUIRES FACTORY INTERNAL WIRING,
 CUSTOMER REQUEST REQUIRED WHEN ORDERING.

A.T.S. ELECTRO-LUBE INTERNATIONAL INC.
 7388 WILSON AVE.
 DELTA, B.C. CANADA
 PHONE 1-800-663-8141
 FAX 1-800-663-8140
 WWW.ATSELECTROLUBE.COM

DRAWING BY: REX. B. DATE: DEC. 2015

APPROVED BY: STEPHAN. D. DATE: DEC. 2015	DESCRIPTION: JACK LUBER SERIES DC POWER SUPPLY REMOTE CONTROL (OPTIONAL) EXTERNAL LOW LEVEL (OPTIONAL)	REV. 1 ITEM
THIS DWG AND ALL INFORMATION HEREON IS PROPERTY OF A.T.S. ELECTRO-LUBE INTERNATIONAL INC. IT MAY NOT BE USED OR COPIED IN ANY WAY WITHOUT NOTIFIED CONSENT OF A.T.S. ELECTRO-LUBE INTERNATIONAL INC.	SCALE: 1:1	THIRD ANGLE PROJECTION
DWG. NO. JAK DCP-DCPRC	TEMP.	